

Jalousie damper

JSMM/ JSMMU



Description

JSMM and JSMMU are jalousie dampers for the closing off or regulation of ventilation systems. JSMM is with motor and JSMMU is prepared for motor.

The damper is built on a frame made from galvanized steel sheet. The damper blades are made from smooth, extruded aluminium profiles with silicon sealing strips on one side, and on the other the side grips to a rubber seal when the damper is closed. The damper blades are finished with a seal made from synthetic material.

On the outside of the frame, the damper blades are individually fitted with fine-tooth ratchets, which ensure a very low torque. Axle shaft 15 x 15 mm is mounted directly to the external ratchet. The external ratchet is supplied with a face plate. The frame can be made using stainless steel, depending on preference.

The dampers can be delivered with 24V or 230V motor.

Temperature range from -20°C to +80°C.

To choose motor see the table damper overview weight/torque.

JSMM is supplied with following connections as standard:

- RJFP 20: $A/B \leq 1250$
- RJFP 30: $1250 < A/B \leq 1600$


For alternative connection size, please see dimension table.

Order code

Product	JSMM
A in mm	500
B in mm	500
D flange size	RJFP-20
Motor type	LM 230-F

Order example: JSMM-500-500-RJFP-20-LM 230A-F

Dimensions

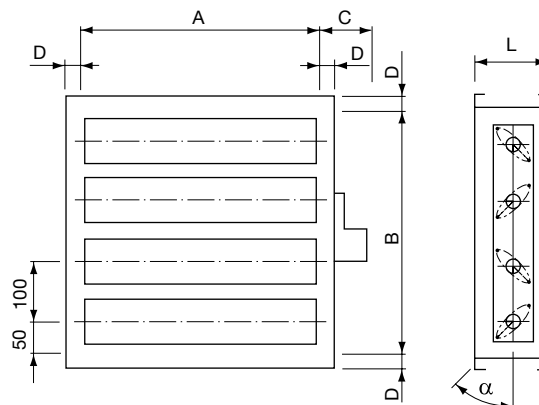


α	Opening angle	
C	Free axle shaft	48 mm
C	LM motor	64 mm
	NM motor	62 mm
	SM motor:	64 mm
	GM motor	70 mm
D	RJFP-20	flanges: 20 mm
	RJFP-30	flanges: 30 mm
	RJFP-40	flanges: 40 mm
L	RJFP-20	flanges: 150 mm
	RJFP-30	flanges: 170 mm
	RJFP-40	flanges: 170 mm

Design advice

- Select damper size based on air velocity and pressure exposure for when the damper is closed.
- Remember the necessary accessories for operation.
- Remember to leave space for unimpeded damper operation at duct crossings for dampers.
- Remember damper blades, horizontal installation.
- Remember to specify the size of the flange.

Installed in round duct

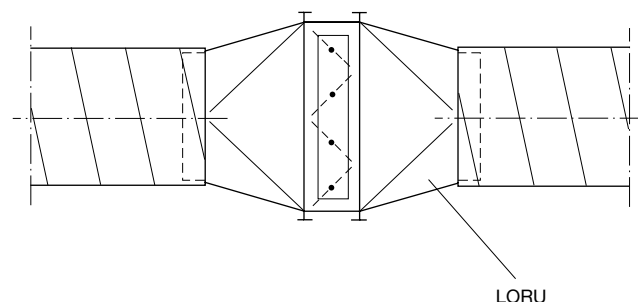


Jalousie damper

JSMM/ JSMMU

Alternatively installed in round duct

JSMM/JSMMU fitted with plate and ILU.


Product name: JSMMILU/JSMMUILU

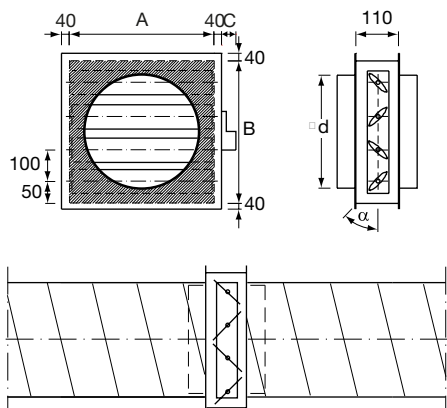

Technical data

Pressure drop

The values are applicable for dampers installed in ducting systems. When they are free flowing, the loss of speed (p_d = dynamic pressure) corresponding to the frontal area should be added. The angle of aperture refers to the dimension sheet.

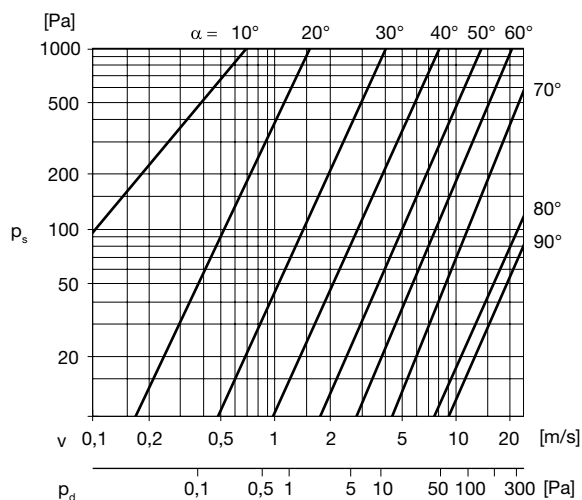

v = air velocity, m/s

p_d = dynamic pressure, Pa

p_s = static pressure, Pa

Tightness class - Closed damper

Blade area m ²	Tightness class
- 0,6	2
0,6 -	3

Maximum pressure difference – Closed damper


Damper width	Pa
1400	2500
1600	2350

Sound data

Sound level L_w (ref. 10^{-12} W) is applicable for dampers with an area of $A=1$ m². For other damper sizes (x) m², the following applies:

$$L_{wx} = L_{w1,0} + 10 \cdot \log x$$

Adjustment values for the individual octave bands are added to the sound levels recorded and are set out in the below table.

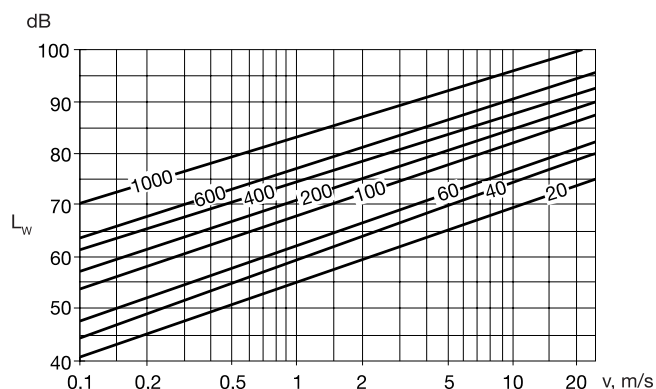

Adjustment values for L_w in octave bands

	Octave band, Hz							
	63	125	250	500	1k	2k	4k	8k
Correction	-7	-7	-10	-11	-12	-15	-17	-20
Tolerance: ± 5 dB								
Example values	78	78	75	74	73	70	68	65

Example

The air velocity in a JSM 800 800 damper ($0,64$ m²) is 8 m/s. The curves show a pressure loss of 400 Pa at the aperture (a) 48°, and a sound level of 87 dB (1 m²)

The present sound levels

$L_{w0,64}$	= $L_{w1,0} + 10 \times \log 0,64$
	= 87 dB - 2 dB
	= 85 dB

The adjusted sound spectrum divided by the individual octave bands is shown by the values in the table for adjusted values.

Jalousie damper

JSMM/ JSMMU

Damper overview

The dampers are supplied in combinations of heights and widths as indicated in the table below. The top figures in the table specify weight (kg) of the individual dampers. The lower figures specify the dampers' torque (Nm) for the selection of a damper motor.

Torque Nm	Motor type
5	LM
10	NM
20	SM
30	GM

		A									
B		200	300	400	500	600	800	1000	1200	1400	1600
100	kg	2,3	2,7								
	Nm	2,0	2,0	2,0							
200	kg	2,7	3,0	3,3	3,6	5,4	7,1				
	Nm	2,0	2,0	2,0	2,0	2,0	4,0				
300	kg	3,0	3,3	3,6	5,4	6,3	7,9	10,6	13,7		
	Nm	2,0	3,0	3,0	4,0	4,0	4,0	5,0	8,0		
400	kg	3,3	3,6	5,4	6,3	7,1	8,6	11,7	14,7	17,7	20,7
	Nm	3,0	3,0	4,0	4,0	4,0	4,0	5,0	8,0	8,0	8,0
500	kg	3,6	5,4	6,3	7,1	7,9	10,6	13,7	16,2	18,5	22,1
	Nm	3,0	4,0	4,0	4,0	5,0	5,0	7,0	8,0	8,0	8,0
600	kg	3,9	6,3	7,1	7,9	8,6	12,7	14,7	17,7	20,7	23,6
	Nm	4,0	4,0	4,0	5,0	5,0	5,0	8,0	8,0	8,0	8,0
800	kg	7,1	7,9	8,6	10,6	11,7	14,7	17,7	20,7	23,6	26,6
	Nm	4,0	4,0	5,0	5,0	5,0	7,0	8,0	8,0	8,0	8,0
1000	kg	8,6	10,6	11,7	13,7	14,7	17,7	20,7	23,6	26,6	29,6
	Nm	5,0	5,0	5,0	7,0	7,0	8,0	8,0	8,0	8,0	10,0
1200	kg	12,7	13,7	14,7	16,2	17,7	20,7	23,6	26,6	29,6	32,5
	Nm	5,0	5,0	7,0	8,0	8,0	8,0	8,0	8,0	10,0	10,0
1400	kg	14,7	16,2	17,7	18,5	20,7	23,6	26,6	29,6	32,5	35,5
	Nm	7,0	7,0	8,0	8,0	8,0	8,0	8,0	10,0	10,0	10,0
1600	kg	16,2	18,5	20,7	22,1	23,6	26,6	29,6	32,5	35,5	38,4
	Nm	8,0	8,0	8,0	8,0	8,0	8,0	8,0	10,0	13,0	15,0

The height B is always a multiple of 100 mm (the width of the damper blades). The dampers can be supplied deviant from this, but the free area will always be the number of slats times 100 mm (minus the damper blade's thickness) with the rest exposed.

E.g. if a damper with A > 500 and B = 275 mm is chosen, then the free area in this damper will be same as a damper with the measurements A = 500 and B > 200 mm.

(* minus the thickness of the damper blade)